INSTALLATION INSTRUCTIONS

Product	Revision	Form
7160-0185 Universal Vehicle Base -	Rev. A	INST-427

1. Place the base in the passenger foot-well with the square hole pattern closest to the transmission hump and seat.
Move the base around until the best location is determined.
Mark the mounting hole locations and note whether it will be necessary to shim any mounting holes with washers to compensate for floor irregularities.

2. Drill a 13/32" hole at each mounting location using care not to damage any equipment below the floor.

3. Using customer supplied bolts, washers and nuts secure the base to the vehicle floor.
Do not use lag bolts or sheet metal screws as these can pull out of the floor.

4. Attach pole and other mounting equipment as directed.

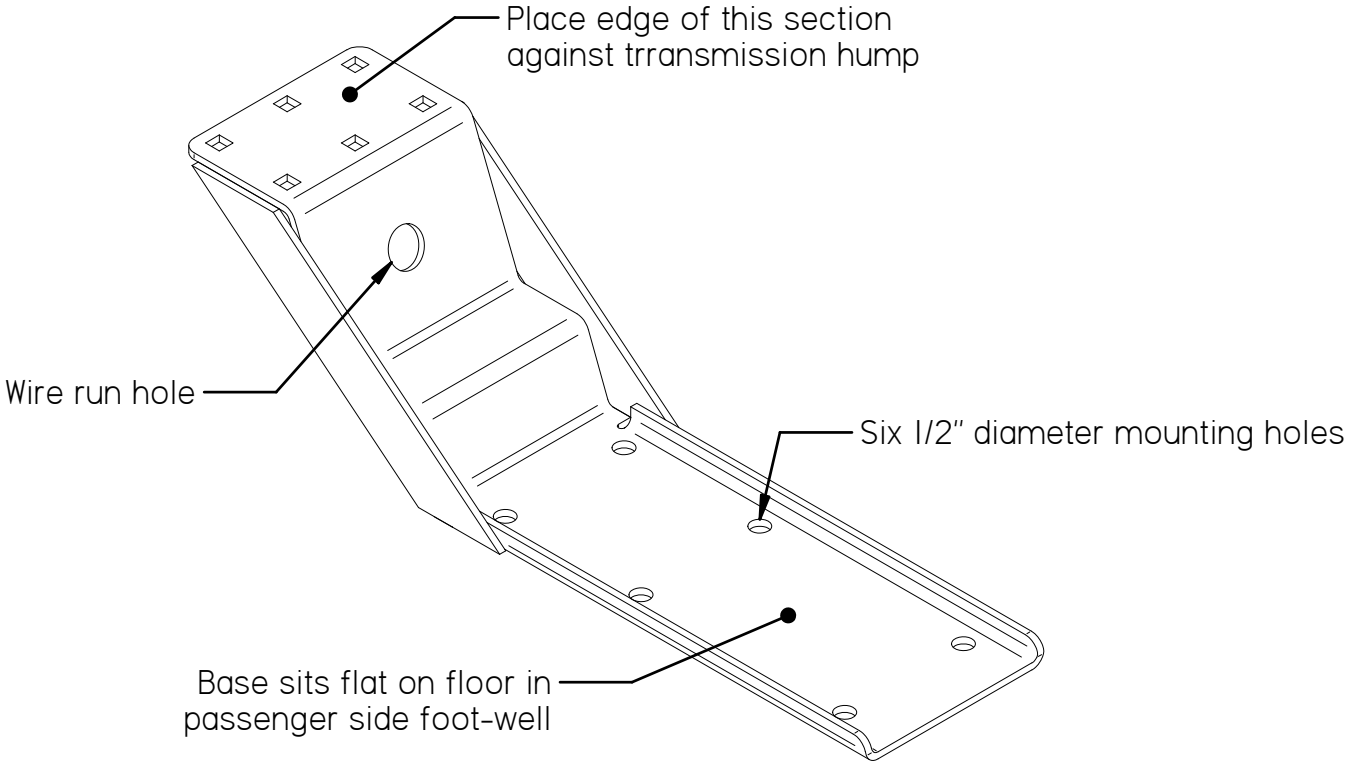
Place edge of this section against trransmission hump
Wire run hole
Six 1/2" diameter mounting holes
Base sits flat on floor in passenger side foot-well

Product Mounting Disclaimer
Gamber-Johnson is not liable under any theory of contract or tort law for any loss, damage, personal injury, special, incidental or consequential damages for personal injury or other damage of any nature arising directly or indirectly as a result of the improper installation or use of its products in vehicle or any other application. In order to safely install and use Gamber-Johnson products full consideration of vehicle occupants, vehicle systems (i.e., the location of fuel lines, brakes lines, electrical, drive train or other systems), air-bags and other safety equipment is required. Gamber-Johnson specifically disclaims any responsibility for the improper use or installation of its products not consistent with the original vehicle manufactures specifications and recommendations, Gamber-Johnson product instruction sheets, or workmanship standards as endorsed through the Gamber-Johnson Certified Installer Program.